


OWNER'S MANUAL

106-30020-01 ECPC

Φ52-53mm(2")



A

如A图,在准备安装仪表面板上开孔Φ52~53mm,并保证面板后面有至少70mm的空间。


Pic A : Before installation , firstly ,to open a hole (Dia:52~53mm) of the panel, make sure there is a space with (70mm backyard of panel) as well



B

如B图,将仪表放入开好孔的仪表面板中


PicB: Put the gauge in the hole



C

如C图,用M4螺母和C型固定扣将仪表锁紧在仪表面板上

Pic C: Using M4 nut and C type bracket to seal up the gauge

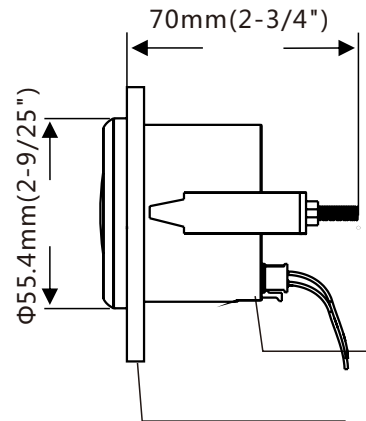

D

如D图,关于外形尺寸的标注说明
Pic D: Size and annotations

仪表功能说明:

- 短按Mode按键(小于1秒)一次,改变背光颜色:背光顺序红色(默认)→绿→蓝→白→黄→黄绿→橙→紫。
- 长按Mode按键>4秒,进入设置模式:
 - 按键短按(小于1秒),可切换设置的仪表,选定需要设置的仪表后(对应数码管闪烁),长按按键(大于2秒)仪表的参数组循环滚动,如油位表设置参数可在F01-F05之间循环滚动选择;如压力表设置参数可在P01-P03之间循环滚动选择。
 - 滚动至仪表将要设定参数组后,松开按键,4S无操作后数据自己保存,并退出设置模式,进入正式显示模式。

Description:


- Short press the MODE button (< 1 second) to change the backlight color: red (default) → green → blue → white → yellow → yellow green → orange → purple.
- Long press the MODE button (>4 seconds) to enter the setting mode:
 - Short press the button (< 1 second) to select the setting indicator. After your selection is confirmed (The corresponding digits will be flickering). Long press the button (>2 seconds) to scroll through the parameter group. Like F01 to F05 for fuel level gauge, P01 to P03 for pressure gauge.
 - After scrolling to the parameter required, release the button (> 4seconds), the setting was successful and data will be saved.

接线:

- 红色线-- +9-32VDC
- 黑色线--油位信号输入
- 橙色线--背光(+)
- 蓝色线--电源负极(-)
- 紫色线--水温信号输入
- 白色线--油压信号输入

Connection:

- Red -- +9-32VDC
- Black -- Fuel Signal Input
- Orange -- Backlight (+)
- Blue -- Ground (-)
- Purple -- Water Temp Signal Input
- White -- Oil Press Signal Input

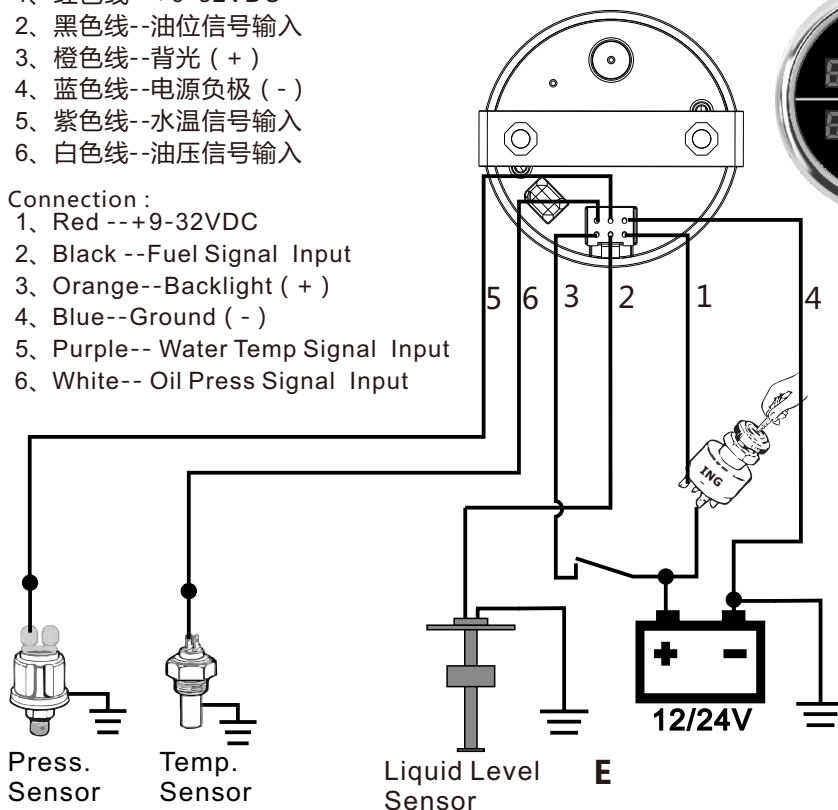

参考E图连接电线:(如果有电压表,则没有信号线)
Connect the cable harness as Picture.E(There is not signal cable for voltmeter)



参数组	对应输入参数	备注
F01	0~190 Ω	出厂默认
F02	0~180 Ω	
F03	10~180 Ω	
F04	240-33Ω	
F05	240-30Ω	
P01	10-184Ω	5.0Bar
P02	10-184Ω	10.0Bar默认
P03	10-184Ω	25.0Bar

Parameter Group	Input Signal	Remark
F01	0~190 Ω	Default
F02	0~180 Ω	
F03	10~180 Ω	
F04	240-33Ω	
F05	240-30Ω	
P01	10-184Ω	5.0Bar
P02	10-184Ω	10.0Bar(Default)
P03	10-184Ω	25.0Bar

技术参数:

工作电压: 9~32VDC,
工作电流: ≤60mA;
工作温度: -30~+70°C
存储温度: -40~+85°C。

Specification:

Operating Voltage: 9~32VDC,
Operating current: ≤60mA;
Operating temperature: -30~+75°C
Storage temperature: -40~+85°C。